


eternalhome

www.eternalhome.ae



20X120CM

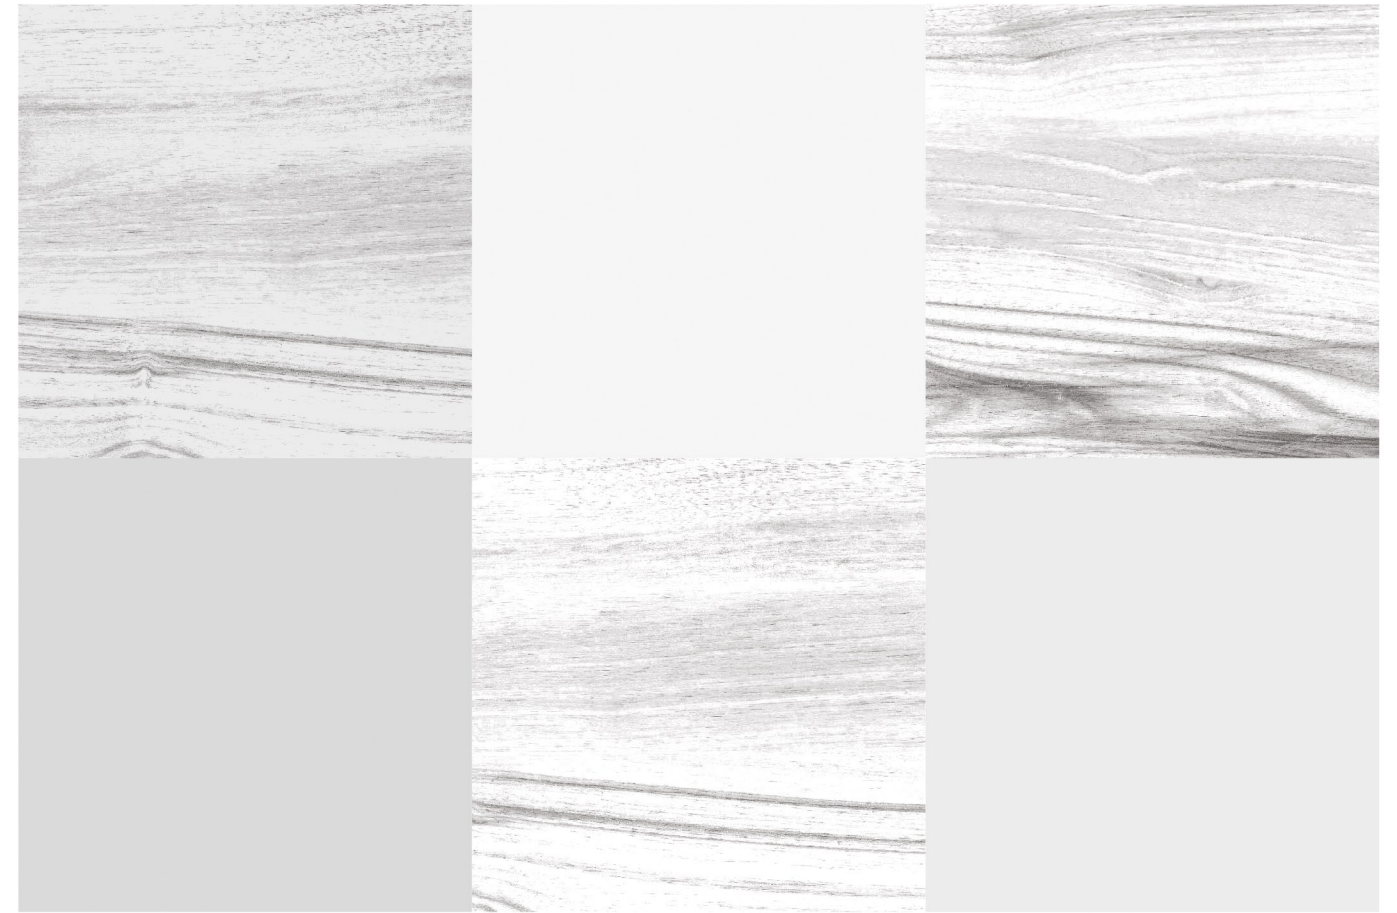

WOODEN
PLANK

eternal
HOME

ETERNAL HOME BUILDING MATERIAL TRADING LLC.
DEJLA STREET, INDUSTRIAL AREA -4, SHARJAH.

Call. +971 585155577, +971 585355577,
+971 504516578, +971 585711777

Mail. hello@eternalhome.ae



SCAN TO ACCESS
ALL PRODUCTS

sfumato india pvt. ltd.

eternal
HOME

who we are

Become a global leader in the world of ceramic tiles by serving masterpieces.

Eternal Home, a brand emerged out from Essence Tiles, was established in the year 2021 with the aim to provide high quality and durable ceramic solutions to the world. Envisioned by the pioneers, Eternal Home has become one of the most trusted and reputed brands among gulf countries.

With our magnificent, sleek, and fashionable ceramic products, we at Eternal Home hope to make the world a more aesthetically attractive and lovely place to live. All of these assertions are supported by the certificates and accreditations we have earned throughout the years.

We have a great pipeline of emerging quality to consistently delivered world-beating product.



DELIVERING THE WORLD-CLASS PRODUCTS

eternalhome.ae

eternal
HOME


group of company

 essence
TILES

 empress
CERAMICS

 eternal
GEAR

 eternal
TILES

 cathenware
BATHWARE

 ENNFACE

20X120CM




WOODEN PLANK

These wooden planks are easy-to-install and manage. However, once installed it naturally enhances the overall luxury of the ambiance.



EXPERIENCE THE REAL WOOD

Choose one of the best wood planks available in 20x120cm to give your home a natural wood-looking show.

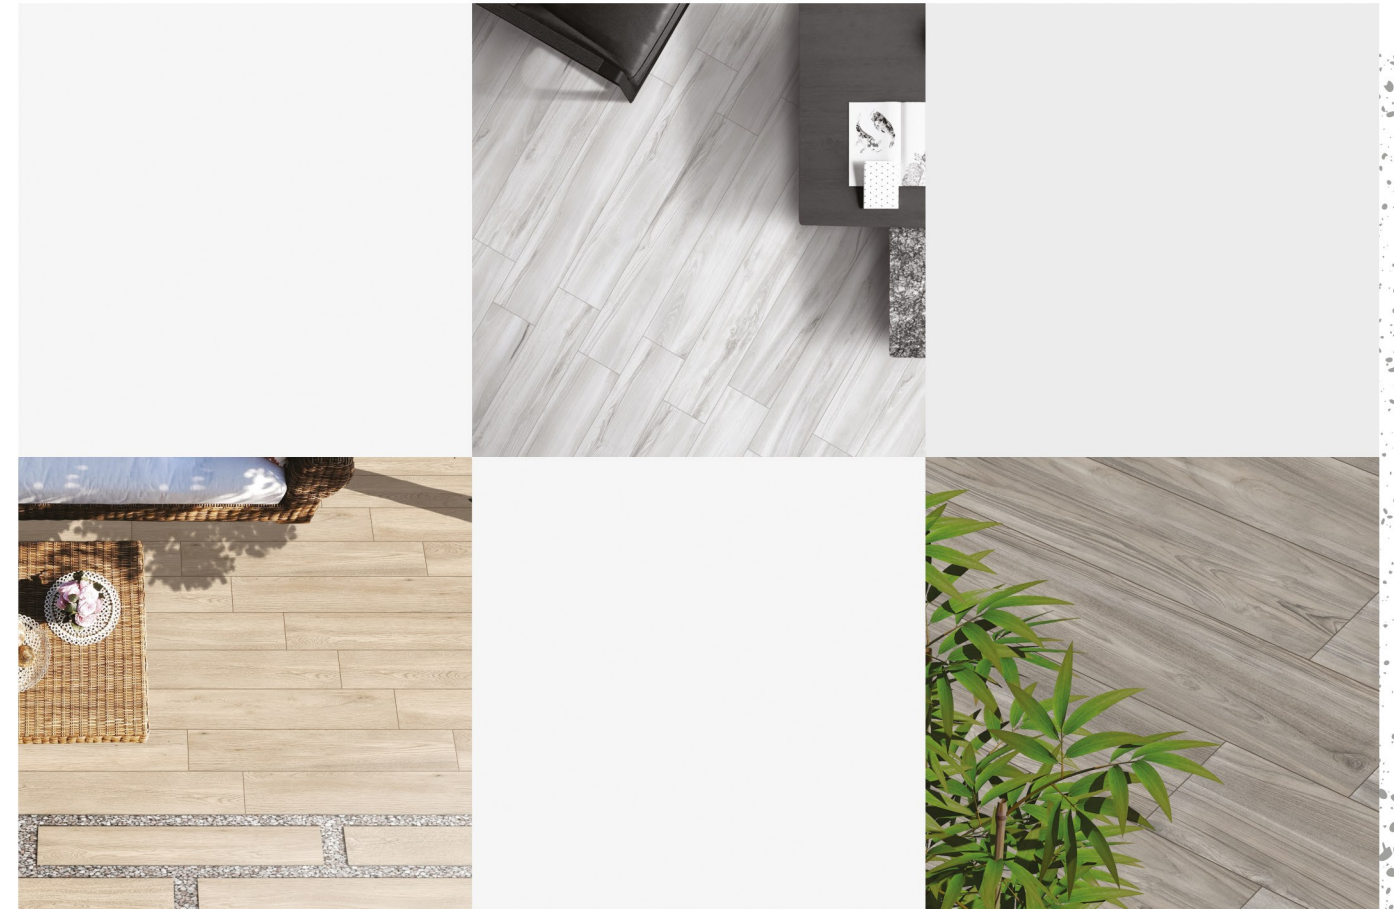

eternal
HOME



100%
PROTECTION



ENVIRONMENT
FRIENDLY



VOC FREE



NON
ALLERGIC



HYGIENIC



SAFETY

ALPINE DARK GREY

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN



RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS



ALPINE TEAK

FORMAT / 20X120CM



MATT -SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN





RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS

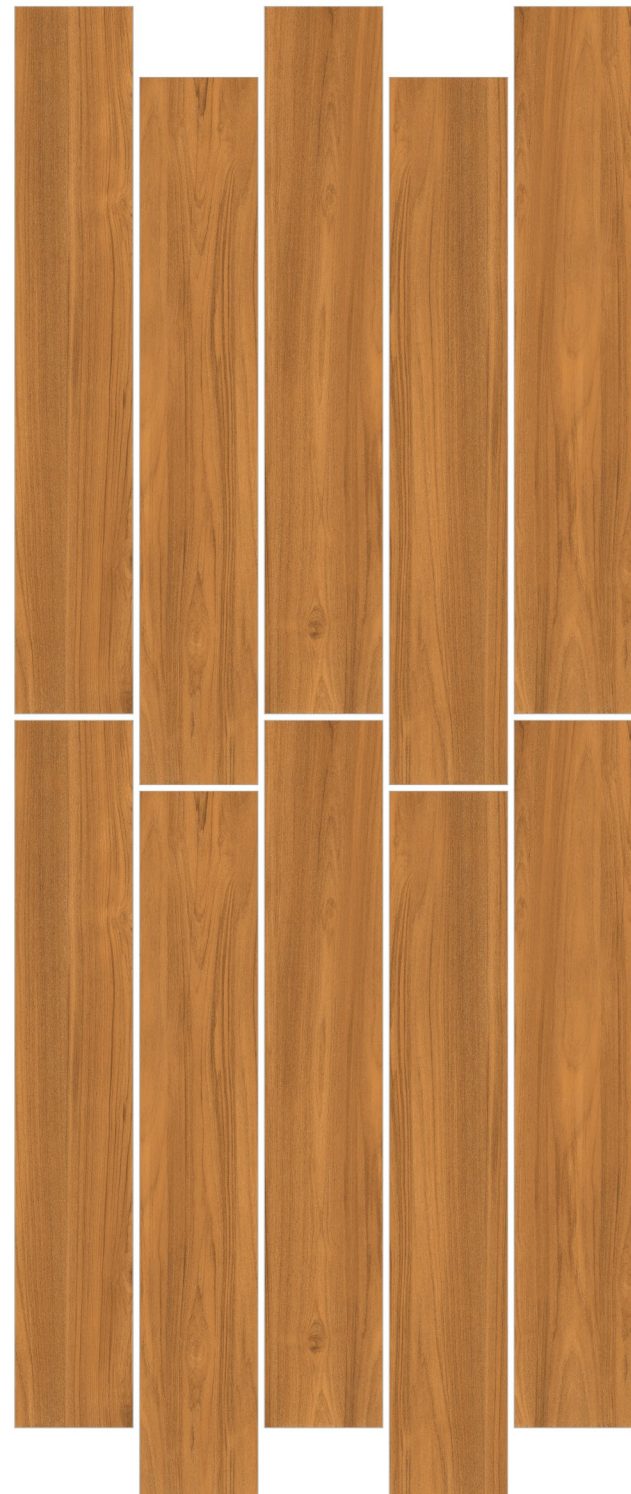

BALBOA BIANCO

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN



RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS



BRICOLA CEREZO

FORMAT / 20X120CM



MATT -SURFACE

- WALL
- FLOOR
- OFFICE
- LIVING ROOM
- KITCHEN
- RESTAURANT
- BATHROOM
- HIGH-TRAFFIC AREAS



eternal
HOME

LEGNO PINE

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN



RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS




MADEIRA PINE

FORMAT / 20X120CM



MATT
-SURFACE

-  WALL
-  FLOOR
-  OFFICE
-  LIVING ROOM
-  KITCHEN
-  RESTAURANT
-  BATHROOM
-  HIGH-TRAFFIC AREAS

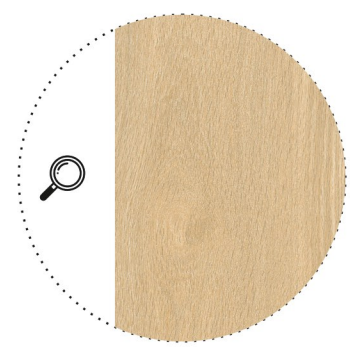

eterna
HOME

MISSAOURI PEACH

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN




RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS



MISSOURI BIANCO

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN



RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS



MISSOURI IVORY

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN





RESTAURANT



BATHROOM



HIGH-TRAFFIC AREAS

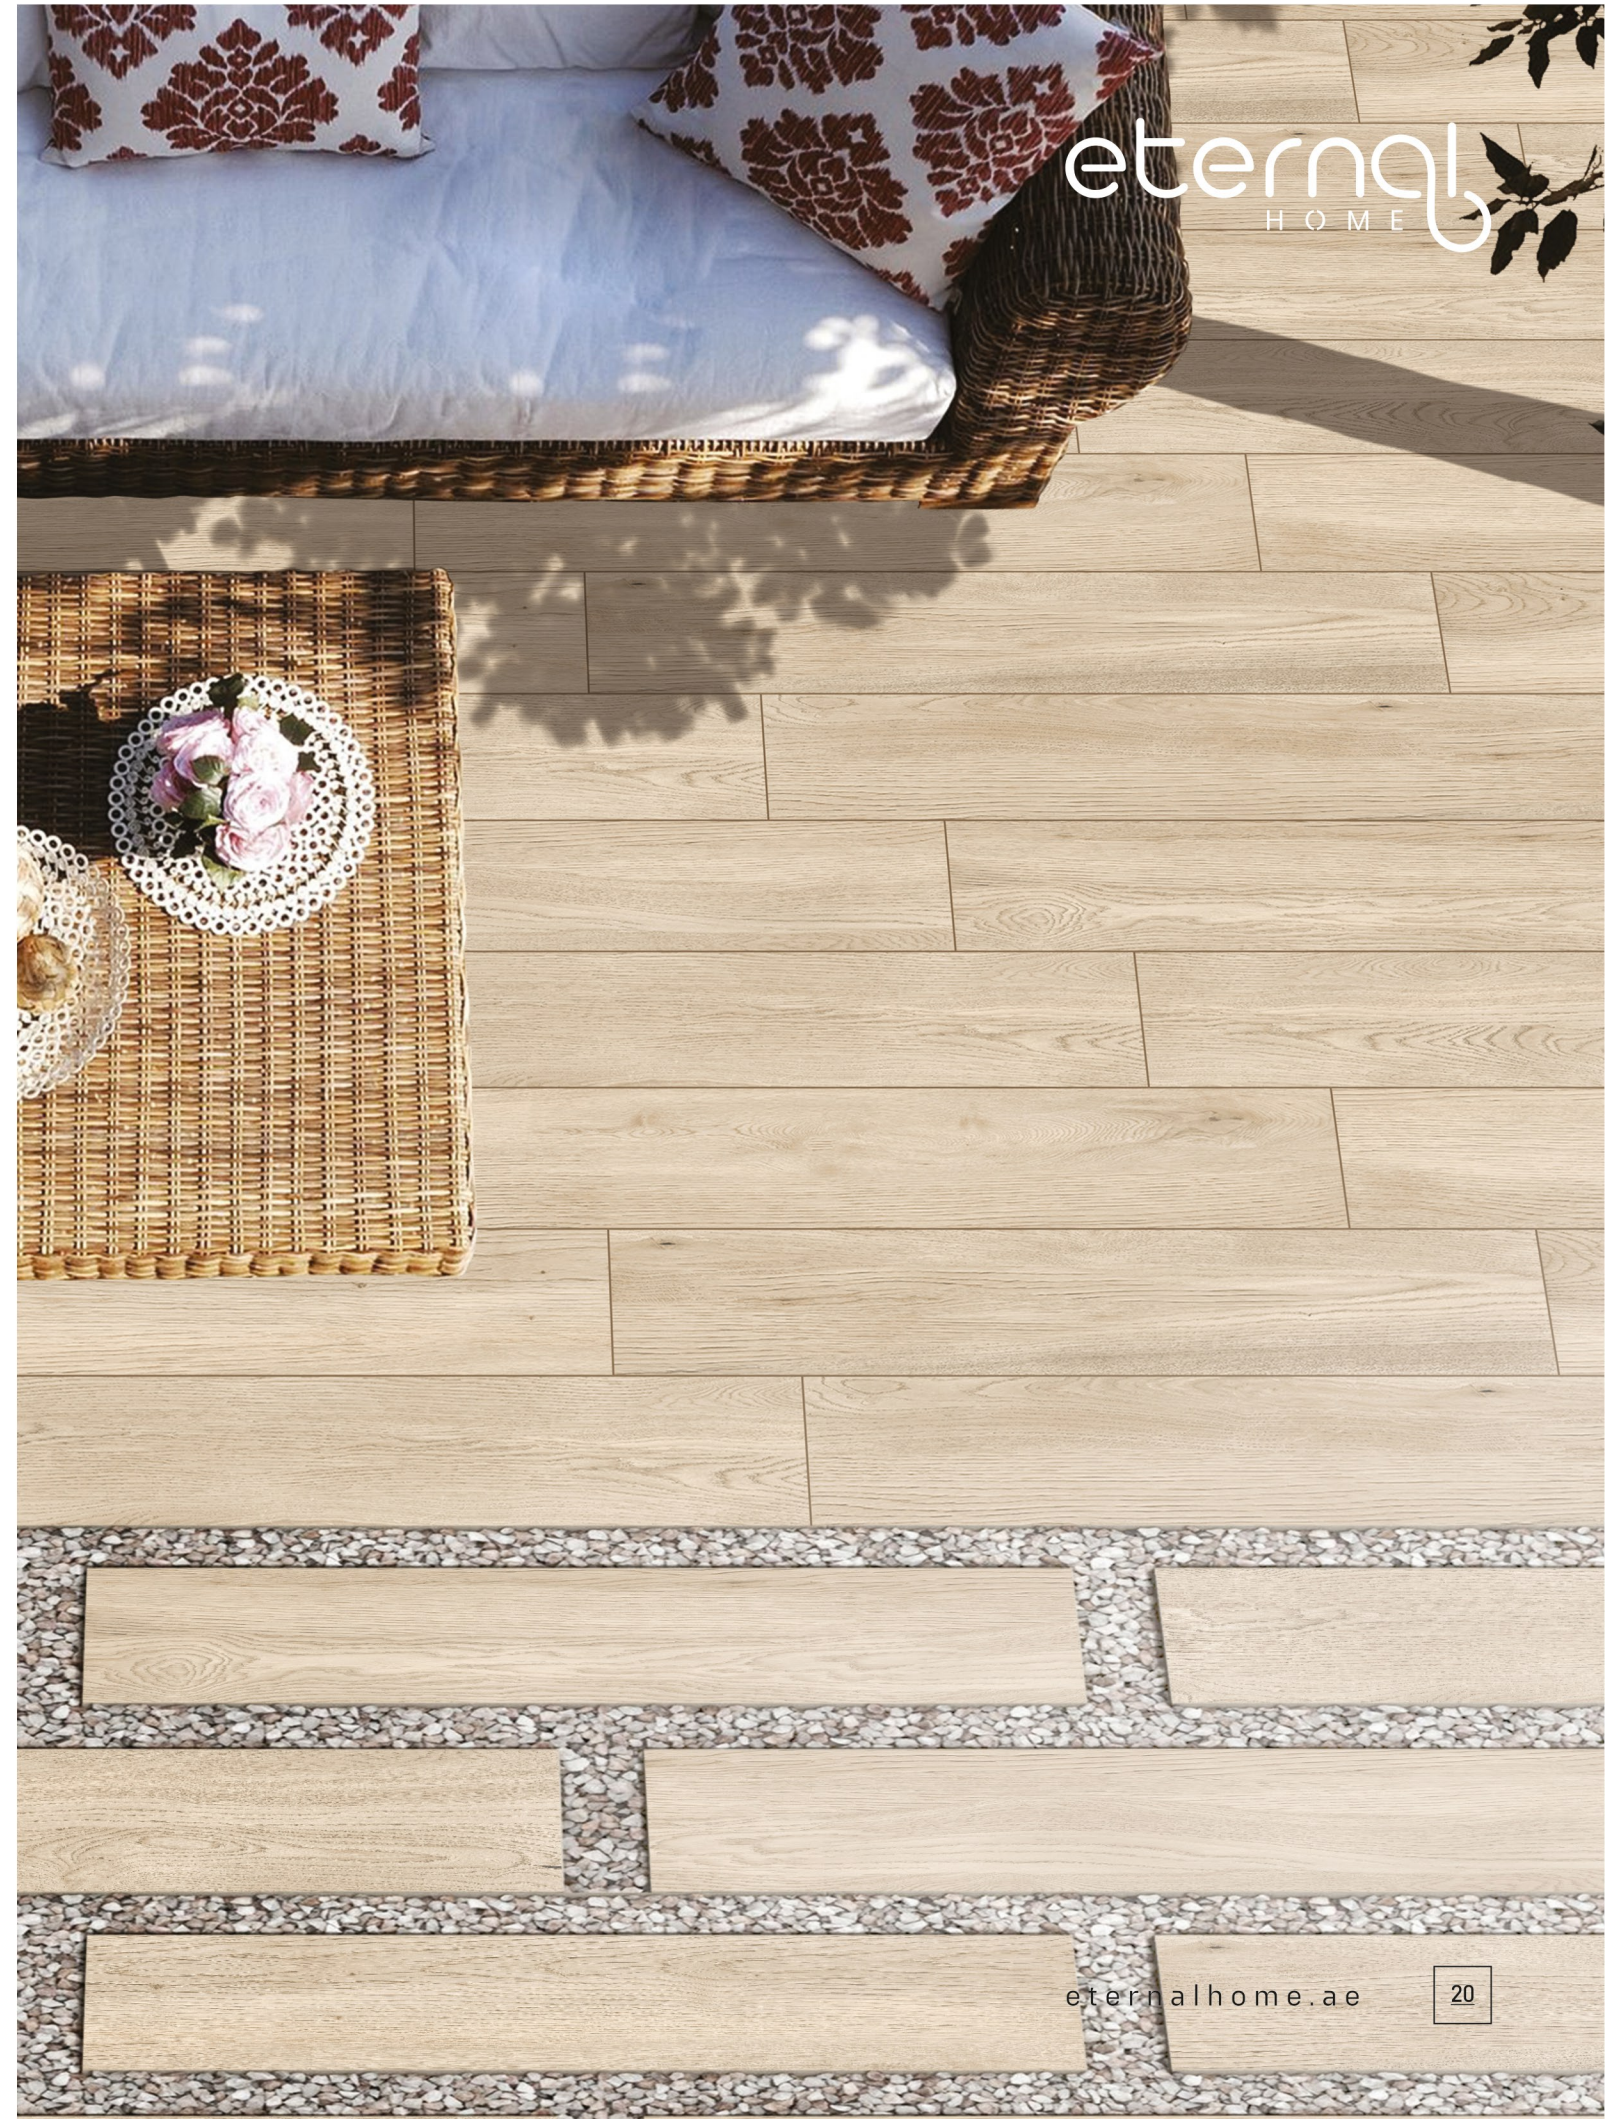

TIMBER WALNUT

FORMAT / 20X120CM



MATT
-SURFACE



WALL



FLOOR



OFFICE



LIVING ROOM



KITCHEN



RESTAURANT




BATHROOM



HIGH-TRAFFIC AREAS




LAYING SOLUTIONS

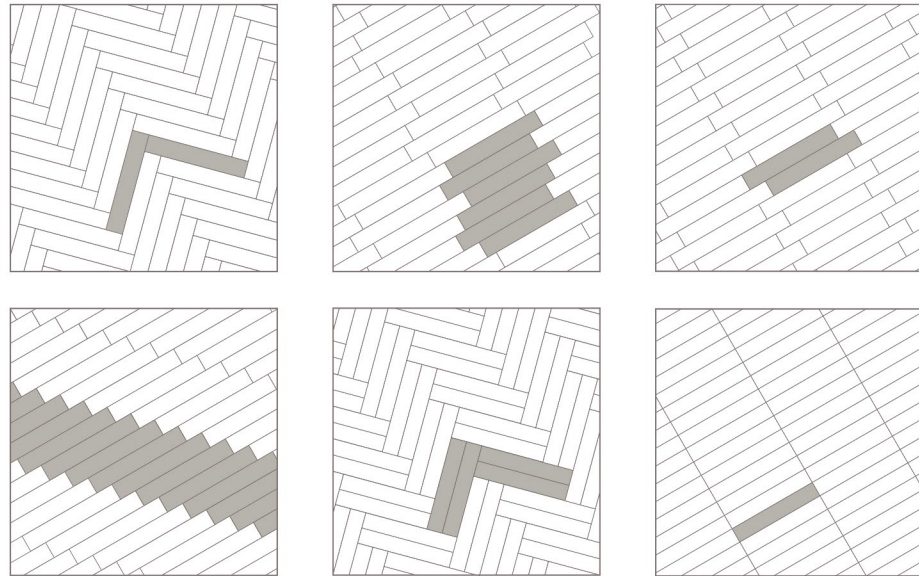

The material should be carefully checked before fixing, especially tonality, caliber and choice. Claims cannot be accepted once the material is installed. The company declines all responsibility for laying without joints; minimum joint laying has a gap of 2 mm.



INSTALLATION ADVICE

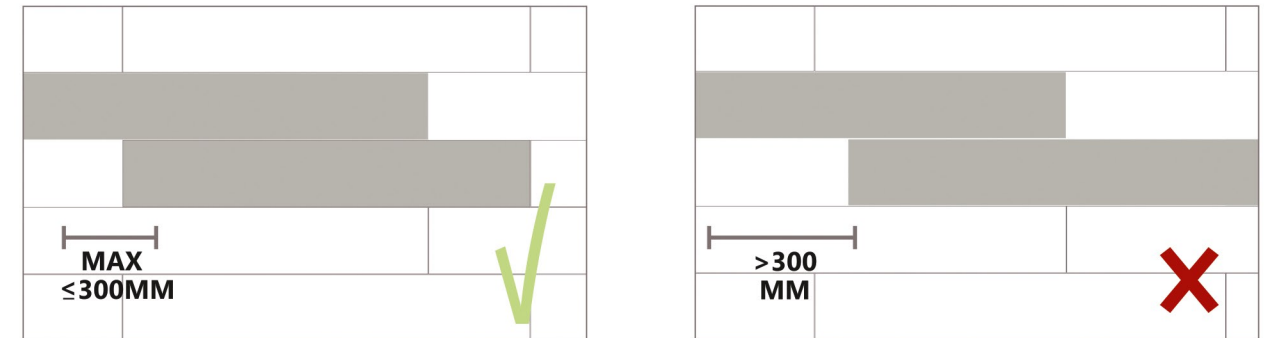

The longest side should be staggered no more than 300mm when laid in running bond.

PORCELAIN STONEWARE - STANDARD EN 14411 (ISO 13006) ANNEX G GROUP BIA, E 0.5%

TECHNICAL SPECIFICATIONS		STANDARDS	VALUES REQUIRED	OUR VALUES	
			RECTIFIED	MATT	
DIMENSIONS		Length and width	$\pm 0,3\%$, max 1 mm	In According	
		Thickness	$\pm 5\%$, max 0,5 mm	In According	
		Wedging	$\pm 0,3\%$, max 1,5 mm	In According	
		Straightness of the edges	$\pm 0,3\%$, max 0,8 mm	In According	
		Flatness	$\pm 0,4\%$, max 1,8 mm	In According	
STRUCTURE		Water absorption - average value %	$\leq 0,5\%$	In According	
		Breaking strength	$S \geq 1300$ N	$S \geq 2000$ N	
		Modulus of rupture	$R \geq 35$ N/mm ²	In According	
		Resistance to surface abrasion	ISO 10545-7	According to classification indicator by manufacture	PEI IV
THERMAL SHOCK		Coefficient of thermal linear expansion	ISO 10545-8	9×10^{-6} max	In According
		Thermal shock resistance	ISO 10545-9	Resistant	Resistant
		Resistance to frost	ISO 10545-12	Resistant	Resistant
SAFETY		Dynamic friction coefficient	DIN 51130	According to the space or the working area	R9/R11*
CHEMICAL RESISTANCE		Resistance to high concentrations of acids and alkalis	ISO 10545-13	Class GHC Min.	Class GHA
		Resistance to low concentrations of acids and alkalis		Class GLC Min.	Class GLA
		Stain resistance	ISO 10545-14	Min. class 3	5

V SHADES



The V-Shade classification indicates the level of shading of the product, ranked from V0 to V4.

PACKAGING

SIZE	THICKNESS	PCS./BOX	SQM/BOX	SQF/BOX
200x1200 mm	9 MM	5	1.20	12.91

FEATURES

